


Hardware Specification	
<b>Model</b>	<b>VDB510 N2-L SDI</b>
<b>Max. FPS</b>	120/100fps @ 1920x1080p
<b>Recording Mode</b>	Software Compression, Real-Time Mode
<b>Product photo</b>	
<b>Dimension</b>	140.00 x 64.41 (mm)
<b>Interface</b>	PCIe x4
<b>Video Input</b>	2 x SDI
<b>Video Output</b>	2 x SDI (Loop-through)
<b>Display Video Format</b>	YUY2
<b>Display Video Resolution</b>	1920x1080p@60/50fps 1920x1080p@30/25/24fps 1920x1080i@60/50fps 1280x720p@60/50fps 720x480i@60fps 720x576i@50fps
<b>Recording Video Format</b>	MPEG4 / H.264 (Software Compression)
<b>Recording Video Resolution</b>	1920x1080p@60/50fps 1920x1080p@30/25/24fps 1920x1080i@60/50fps 1280x720p@60/50fps 720x480i@60fps 720x576i@50fps
<b>Audio Input</b>	2 x SDI
<b>Audio Format</b>	Stereo / 16-bit / 32000 ~ 48000Hz
<b>WatchDog</b>	✓
<b>Multiple Cards</b>	∞
<b>SDK</b>	VC++ / .NET / VB
System Requirement	
<b>OS Support</b>	Windows XP / Vista / Windows 7 ( 32-bit and 64-bit )

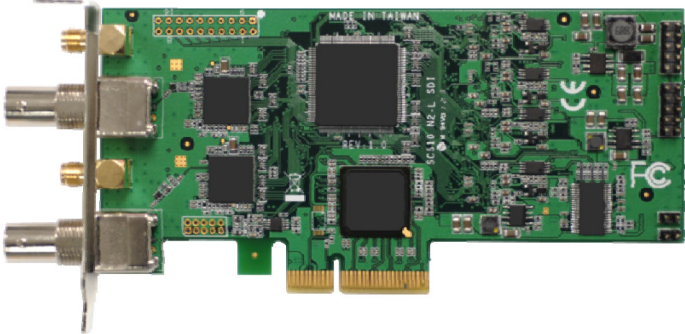